
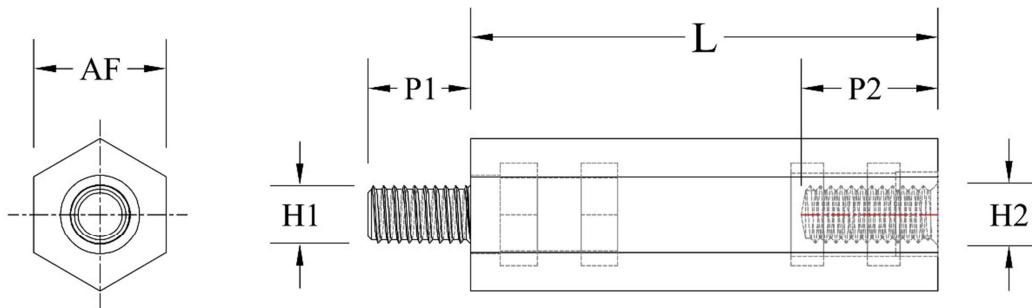


## PCB Spacers (Thread-M5 & AF-13.0 mm)

Full Hex PCB Spacer standoff insulators available in Metric threads, in variety of heights & inserts, in Male-Female combination.

- Self-Extinguishing, UL 94 V0 Rated
- Operating Temperature range from (-) 40°C to 130°C.

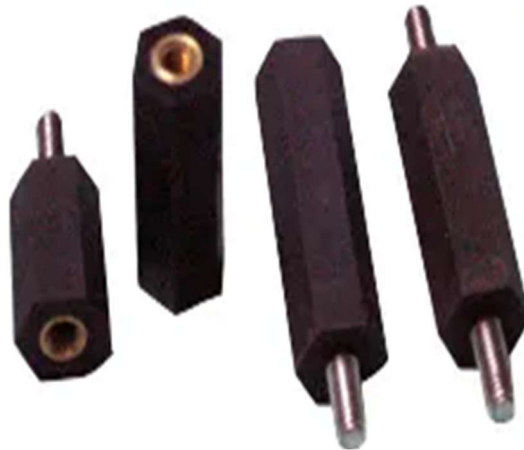

Cat No.	Dimensions in mm					
	L	H1	P1	H2	P2	AF
5S15-13	15	M5	7	M5	7	13
5S20-13	20	M5	7	M5	7	13
5S25-13	25	M5	7	M5	7	13
5S30-13	30	M5	7	M5	7	13
5S45-13	45	M5	7	M5	7	13
5S55-13	55	M5	7	M5	7	13
5S70-13	70	M5	7	M5	7	13
5S85-13	85	M5	7	M5	7	13
5S120-13	120	M5	7	M5	7	13

- All Dimensions are in mm only.
- Tolerance is applicable as per DIN Standard 2768.

-----**Global Commitment**

