
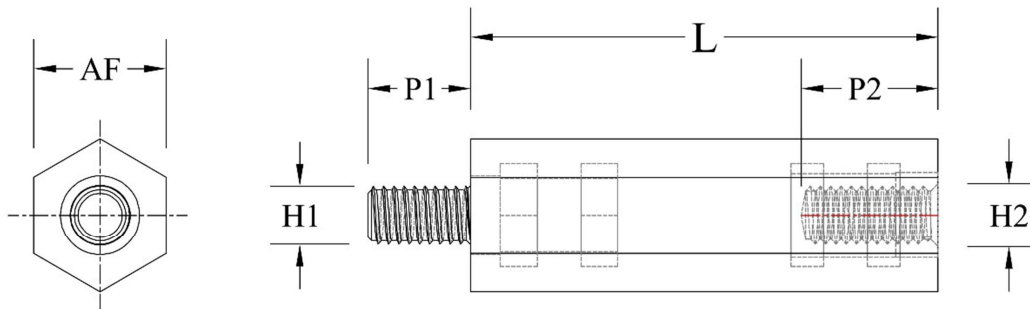


## PCB Spacers (Thread-M6 & AF-13.0 mm)

Full Hex PCB Spacer standoff insulators available in Metric threads, in variety of heights & inserts, in Male-Female combination.

- Self-Extinguishing, UL 94 V0 Rated
- Operating Temperature range from (-) 40°C to 130°C.

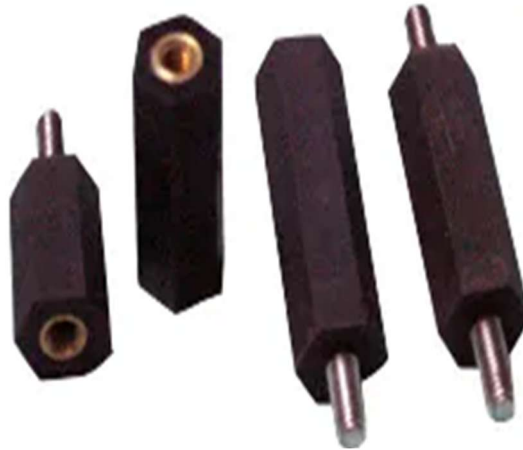

Cat No.	Dimensions in mm					
	L	H1	P1	H2	P2	AF
6S15-13	15	M6	7	M6	7	13
6S20-13	20	M6	7	M6	7	13
6S25-13	25	M6	7	M6	7	13
6S30-13	30	M6	7	M6	7	13
6S45-13	45	M6	7	M6	7	13
6S60-13	60	M6	7	M6	7	13
6S70-13	70	M6	7	M6	7	13
6S120-13	120	M6	7	M6	7	13

- All Dimensions are in mm only.
- Tolerance is applicable as per DIN Standard 2768.

-----**Global Commitment**

