


RH (Male-Female Combination) Standoff Insulators

RH (Male-Female Combination) standoff insulators available in both Metric & UNC Threads & in variety of heights & inserts.

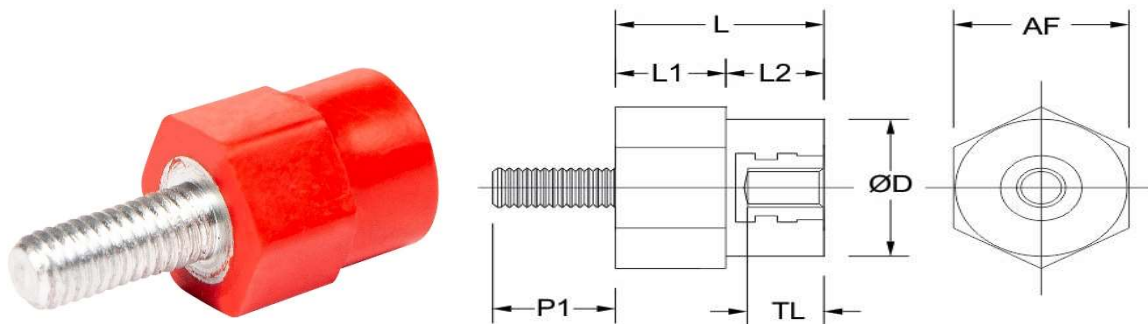

Our Insulators are moulded from a flame retardant and track resistance glass reinforced Thermoset Polyester compound recognized to use for current carrying devices under UL Material Recognition No. E249670.

- **Glow Wire Test - 960 °C**
- **Self-Extinguishing, UL 94 Vo Rated**
- **Non-Hygroscopic Material**
- **Halogen Free**
- **Operating Temperature range from (-) 40°C to 130°C.**

Part No	Dimension						
	AF	Ø D	L	L1	L2	P1	TL
	mm	mm	mm	mm	mm	mm	mm
Hex Face to Face (A/F 14mm)							
RH14.17-HM4.10RF4.07	14	14	17	9	8	M4X10	M4X07
RH14.17-HM6.10RF6.07	14	14	17	9	8	M6X10	M6X07
RH14.17-HM5.10RF5.07	14	14	17	9	8	M5X10	M5X07
Hex Face to Face (A/F 21 mm)							
RH21.26-HF8.08RM8.10	21	20	26	8	18	M8X8	M8X10
RH21.26-HM8.10RF8.08	21	20	26	8	18	M8X10	M8X08

- All Dimensions are in mm only.
- Tolerance is applicable as per DIN Standard 2768.

-----**Global Commitment**

www.powermatindia.com



Mail us : powermat@powermatindia.com